


## Inch Bearing

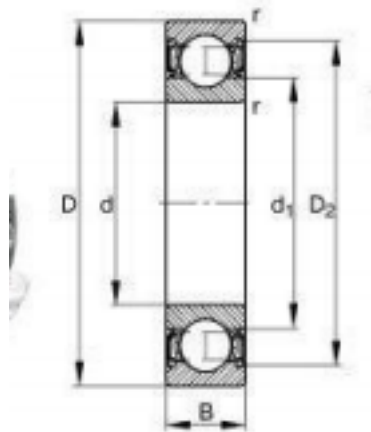

select Inquiry	Bearing NO.	Dimension(mm)				Basic Load Rating(N)		Weight (kg)	
		d(mm)	D(mm)	B(mm)	B1	r min(mm)	Dynamic( Cr)		Static( Cor)
R 144	3.175	6.35	2.38	2.779	0.08	294	98	0.0003	
R 2	3.175	9.525	3.969	3.969	0.30	640	226	0.0014	
R 2A	3.175	12.7	4.366	4.366	0.30	640	226	0.0033	
EE0	3.175	12.7	4.366	4.366	0.30	715	283	0.0033	
R 155	3.969	7.938	2.779	3.175	0.08	392	147	0.0006	
R 156	4.762	7.938	2.779	3.175	0.08	392	147	0.0005	
R 166	4.762	9.525	3.175	3.175	0.08	715	274	0.0008	
R 186	4.762	12.7	2.779	3.969	0.13	1313	490	0.0020	
R 3	4.762	12.7	3.969	4.978	0.30	1310	485	0.0029	
EE1	4.762	12.7	3.969	4.978	0.30	1310	485	0.0029	
1601	4.762	17.462	6.35	7.938	0.30	1970	730	0.0070	
R 168	6.35	9.525	3.175	3.175	0.08	421	205	0.0006	
R 188	6.35	12.7	3.175	4.762	0.13	833	372	0.0020	
R 4	6.35	15.875	4.978	4.978	0.30	1470	600	0.0045	
1602	6.35	17.4652	6.35	7.938	0.30	1970	730	0.0065	

Inch Bearing

R 4A	6.35	19.05	5.556	7.144	0.40	2410	911	0.0100	
EE 2	6.35	19.05	50556	70144	0.40	2410	911	0.0100	
R 1810	7.938	12.7	3.969	3.969	0.13	882	421	0.0017	
1603	7.938	22.225	7.144	8.731	0.30	3290	1360	0.0120	
1605	7.938	23.019	7.938	7.938	0.30	3330	1410	0.0160	
R 6	9.525	22.225	5.556	7.144	0.40	3350	1410	0.0117	
EE 3	9.525	22.225	5.556	7.144	0.40	3350	1410	0.0177	
1604	9.525	22.225	7.144	8.731	0.40	3330	1410	0.0105	
1606	9.525	23.019	7.938	7.938	0.40	3330	1410	0.0150	
1614	9.525	28.575	9.525	9.525	0.60	5110	2390	0.0300	
1607	11.12	23.019	7.938	7.938	0.40	2690	1270	0.0300	
1615	11.12	28.575	9.525	9.525	0.60	5110	2390	0.0280	
1620	11.12	34.925	11.112	11.112	0.60	7450	3700	0.0500	
R 8	12.7	28.575	6.35	7.938	0.40	5110	2380	0.0210	
EE 4	12.7	28.575	6.35	7.938	0.40	5110	2380	0.0210	